


Temperature Humidity Meters



Models	UT331+	UT332+	UT333	UT333BT	UT333S	A13T
Page	112	112	114	114	115	129
						
Measuring mode	All-in-one	All-in-one	All-in-one	All-in-one	Spilt type	All-in-one
Temperature	-20°C~70°C	-20°C~70°C	-10-60°C	-10-60°C	-10-60°C	-10-50°C
Dew point temperature	-78.2°C~70°C	-78.2°C~70°C				
Wet bulb temperature	-21.6°C~70°C	-21.6°C~70°C				
Temperature resolution	0.1°C	0.1°C	0.1°C	0.1°C	0.1°C	±1°C
Humidity range	0%RH~100%RH	0%RH~100%RH	0%RH~100%RH	0%RH~100%RH	0%RH~100%RH	20%RH~95%RH
Humidity resolution	0.1%RH	0.1%RH	0.1%RH	0.1%RH	0.1%RH	±5%RH
Data storage	299sets	999sets				
Auto power off	●	●	●	●	●	
APP/Bluetooth				●		
USB communication	●	●				
Unit conversion (°C/°F)	●	●	●	●	●	●
Humidity/temperature offset settings	●	●				
Data hold	●	●	●	●	●	
Data recall	●	●				
LCD backlight	●	●	●	●	●	
Overload alarm					●	●
Certificates	CE/UKCA	CE/UKCA	CE/UKCA	CE/UKCA	CE/UKCA	CE/UKCA

A13T measures real-time temperature and humidity and displays readings on a large screen. It can be used for both indoor and outdoor measurements. A13T has alarm clock, 12/24 clock mode, hanging hole, and wall or table mount stand.

Applications: Offices, hotels, schools, factories, meeting rooms, pharmacies, warehouses, restaurants, greenhouses, nurseries, gardens, homes, shopping malls, museums, animal husbandry, and more.

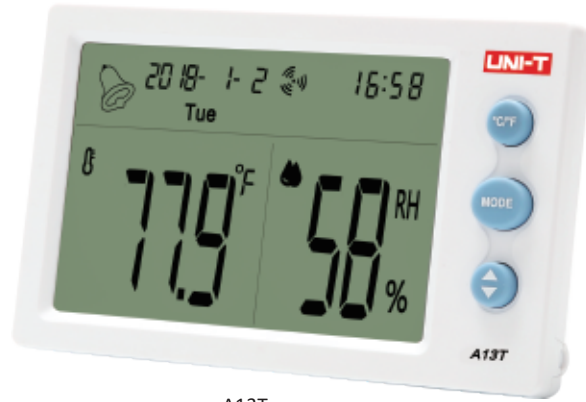

A13T

Specifications	Range	Accuracy
Certificates	CE, UKCA	
Temperature (°C)	-10°C~50°C	±1°C (0~40°C)
Humidity	20%~95%RH	±5%RH (40%~80%RH)
°C/°F selection	√	
Sampling time	10s	
Alarm clock/time display	√	
Date/calendar	√	
12/24 hour modes	√	

Characteristics	
Standard accessories	Batteries, English manual
Power	1.5V battery (R03) x 1
Display	92.5 x 60mm
Product size	130 x 22 x 78mm
Product net weight	110g
Standard individual packing	Gift box
Standard quantity per carton	80pcs
Standard carton measurement	400 x 330 x 290mm
Standard carton gross weight	12.2kg