





WW158B-M01E (5A/250V)

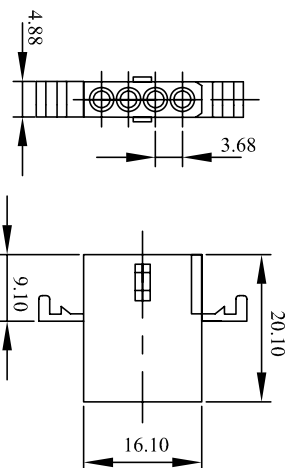


WW158B-M04E (5A/250V)




WW158B-M06E (5A/250V)

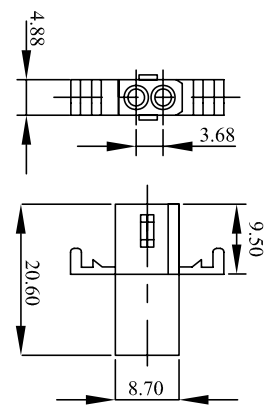



WW158B-M02E (5A/250V)

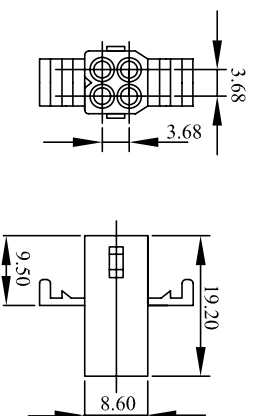


WW158B-M04-1E (5A/250V)




WW158B-M09E (5A/250V)

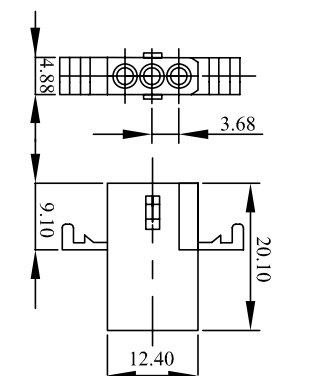


WW158B-M03E (5A/250V)

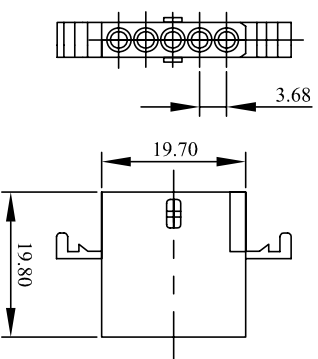


WW158B-M05E (5A/250V)



WW158B-M12E (5A/250V)



WW158B-M15E (5A/250V)

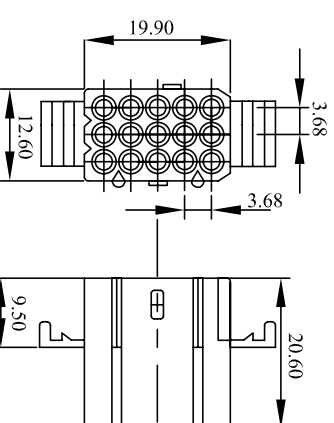

Specification:
Material: Nylon 66 UL94V-2
Current rating: 5A AC, DC Max
Voltage Rating: 300V AC, DC Max
Contact resistance: 15mΩ Max
Insulation resistance: 1000MΩ Min
Withstanding voltage : 1500V AC/Minute
Temperature range: -25°C to +85°C
Applicable panel thickness: 2 mm max

REV	DESCRIPTION/DATE	DRAWN BY: STORMLI	CUSTOMER:	THIRD ANGLE PROJECTION	UNITS: MM
△		CHECKED BY: SIMMON			
△		APPROVED BY: TONY			

PART NO.:		WW158B-M(E) Series	
TITLE:		Housing	
GENERAL DIMENSION TOLERANCE		X X	±0.25
		X X X	±0.1
		X X X X	±0.08

SGS REPORT NO.: KA/2004-80788/A-2

