


Models	UT371	UT372	UT373
Page	123	123	124
			
RPM range	10RPM~999999RPM	10RPM~999999RPM	10RPM~999999RPM
Counting measurement	0~99999 counts	0~99999 counts	0~99999 counts
Target distance	50~200mm	50~200mm	50~200mm
Data hold	●	●	●
Auto power off	●	●	●
Low battery indication	●	●	●
MAX/MIN/AVG mode	●	●	●
LCD backlight			●
USB interface		●	
Drop test			1m
Laser on indication			●
Auto range			●
Overload indication			●
Certificates	CE/UKCA	CE/UKCA	CE/UKCA

UT373 is a reliable digital non-contact tachometer used to measure rotation speed of motors and other machines. This device is able to display results in RPM or revolution count. UT373 is able to safely measure rotational objects through a non-intrusive method.

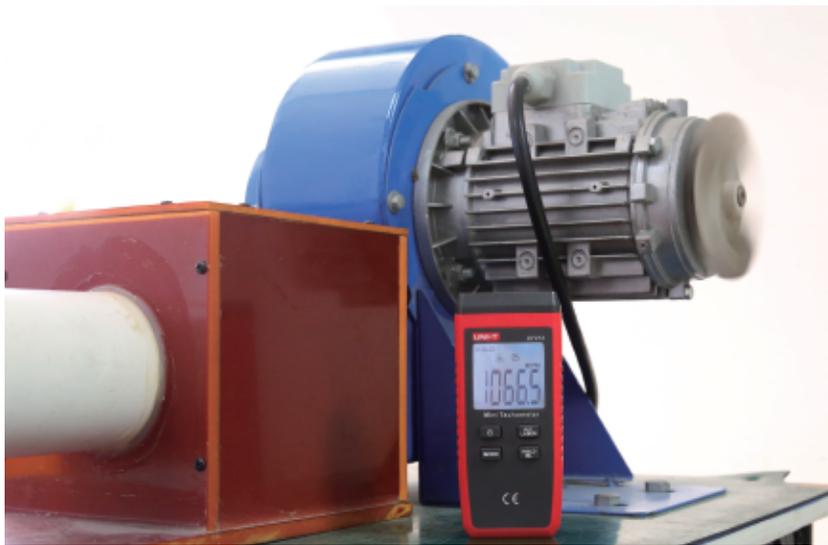

UT373

Specifications	Range	Resolution	Accuracy
<b>Certificates</b>	CE, UKCA		
RPM measurement	10~99999RPM	0.1	±(0.04%+2)
Counting measurement	0~99999 counts	1	±1
Refresh rate	1s to 7s (>120rpm for 1s)		
Sensor type	Photodiode and laser tube		
Target distance	50mm~200mm		
Measuring angle	±30° from perpendicular		
Drop proof	1m		

Features	
Auto range	Data hold
Auto power off	MAX/MIN
Low battery indication	Overload indication
Laser-on indication	LCD backlight

Characteristics	
Standard accessories	Batteries, reflective tape, English manual
Power	1.5V battery (R03) x 3
Display	5-digit segment code; 99999 max display
Product size	120 x 53 x 28.5mm
Product net weight	85g (excluding battery)
Standard individual packing	Gift box
Standard quantity per carton	20pcs
Standard carton measurement	272 x 225 x 220mm
Standard carton gross weight	3kg